



522



524



525-526



527



528-529



530-531



532-533



534-535



536



537



538



539



540



541



542



543



544



545



546



547



## ELECTRONIC LOCKING SYSTEM

518-547



## MONITORING & ACCESS CONTROL CONCEPT

The security of IT cabinets in server rooms and data centres is becoming more important worldwide. The reason is that a typical IT infrastructure supports the entire organization and stores the know how of the company.

We have developed an integrated access control system called ELS.

This new system enables you to monitor and control your IT environment in a very efficient way. Sensors detect door access, variations in temperature, security and other variables to give you immediate notification and greater control over your network, all at a great value. Cabinet doors can be opened by RFID cards, a key pad or remote control units.

This solution manages who can open which cabinet doors and when and allows you to get a detailed report for each cabinet.

### Basic features

- Provides environmental monitoring, access control and a management system
- Prevents unauthorized access
- Allows doors to be opened using a proximity card, keypad or via a web interface
- Accommodates sensors to monitor temperature, humidity, smoke, the presence of water or liquids, etc.
- Automatically generates an audio alert
- Records all the security information you need every time the door to a server cabinet is opened – whom, where, when



### Applications

- Server cabinets
- Data centres
- Electric panels
- Telecommunications
- Kiosks
- GSM Cabinets



## SYSTEM OVERVIEW

- IP monitoring of environmental conditions in the rack cabinet
- Control of physical access to the rack cabinet
- User interface via proximity card reader or keypad
- Electronic lock access authorisation

### Monitoring and Access Control Units



Management Software

### Standalone Access Interfaces



S-AIK : Access Interface Keypad  
S-AIP : Access Interface Proximity

ACU : Access Control Unit  
ACU Plus : Access Control Unit  
AIK : Access Interface Keypad  
AIP : Access Interface Proximity

### Other Electromechanical Locks



### Electronic Swinghandles





# ELECTRONIC LOCKING SYSTEM

## ACU ACCESS CONTROL UNIT

3402



The ACU is an intelligent device for controlling electronic locks and monitoring door status.


- Control of physical access to the rack cabinet
- Monitors and manage security conditions over IP
- User database
- Management software for monitoring and configuring the unit
- A sensor for detecting the state of the door (open/closed) can be connected
- Up to 16 AIs (3414 and 3415) can be connected to ACU.

### MANAGEMENT SOFTWARE

- Configure network settings (IP address, subnet mask, default gateway, DNS, etc.) and user-administrative settings
- Add and remove users
- View and delete the logs

### APPLICATIONS

Suitable for data centres, co-location centres, web hosting facilities, telecom racks or any unmanned area/site that needs to be monitored

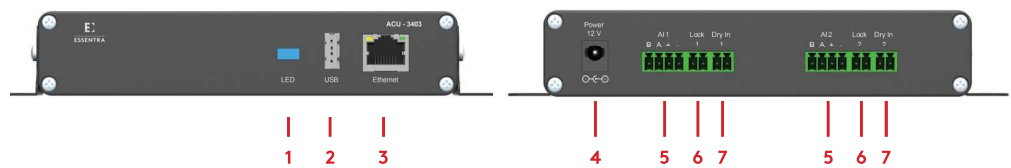

- 1 ► LED indicator
- 2 ► USB 2.0
- 3 ► Ethernet port 10/100
- 4 ► Power input (12VDC 3A)
- 5 ► 18 x access interface inputs
- 6 ► 2 x lock outputs
- 7 ► 2 x dry contact inputs

### Dry Contact Inputs

- Dry contact inputs to monitor changes in the environment
- Inputs can be used as sensor input for detecting the state of the door (open/closed)


### Access Interfaces

- 2 x access interface inputs allow access by entering a code number or presenting a proximity card.
- Possible to connect 3414 - AIK and 3415 - AIP devices.

### Lock Outputs


- 2 x lock outputs to control physical access to the cabinet
- Possible to connect wide range of locks.

## MANAGEMENT SOFTWARE

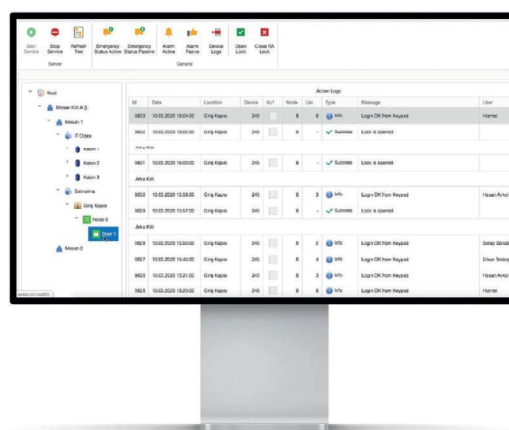

- User friendly interface
- Support SMS and email notifications
- Monitor all door and handle status in one screen
- Control all connected swinghandle from remote
- MS SQL database
- Easy configuration with ELS Configuration Software

## SYSTEM OVERVIEW

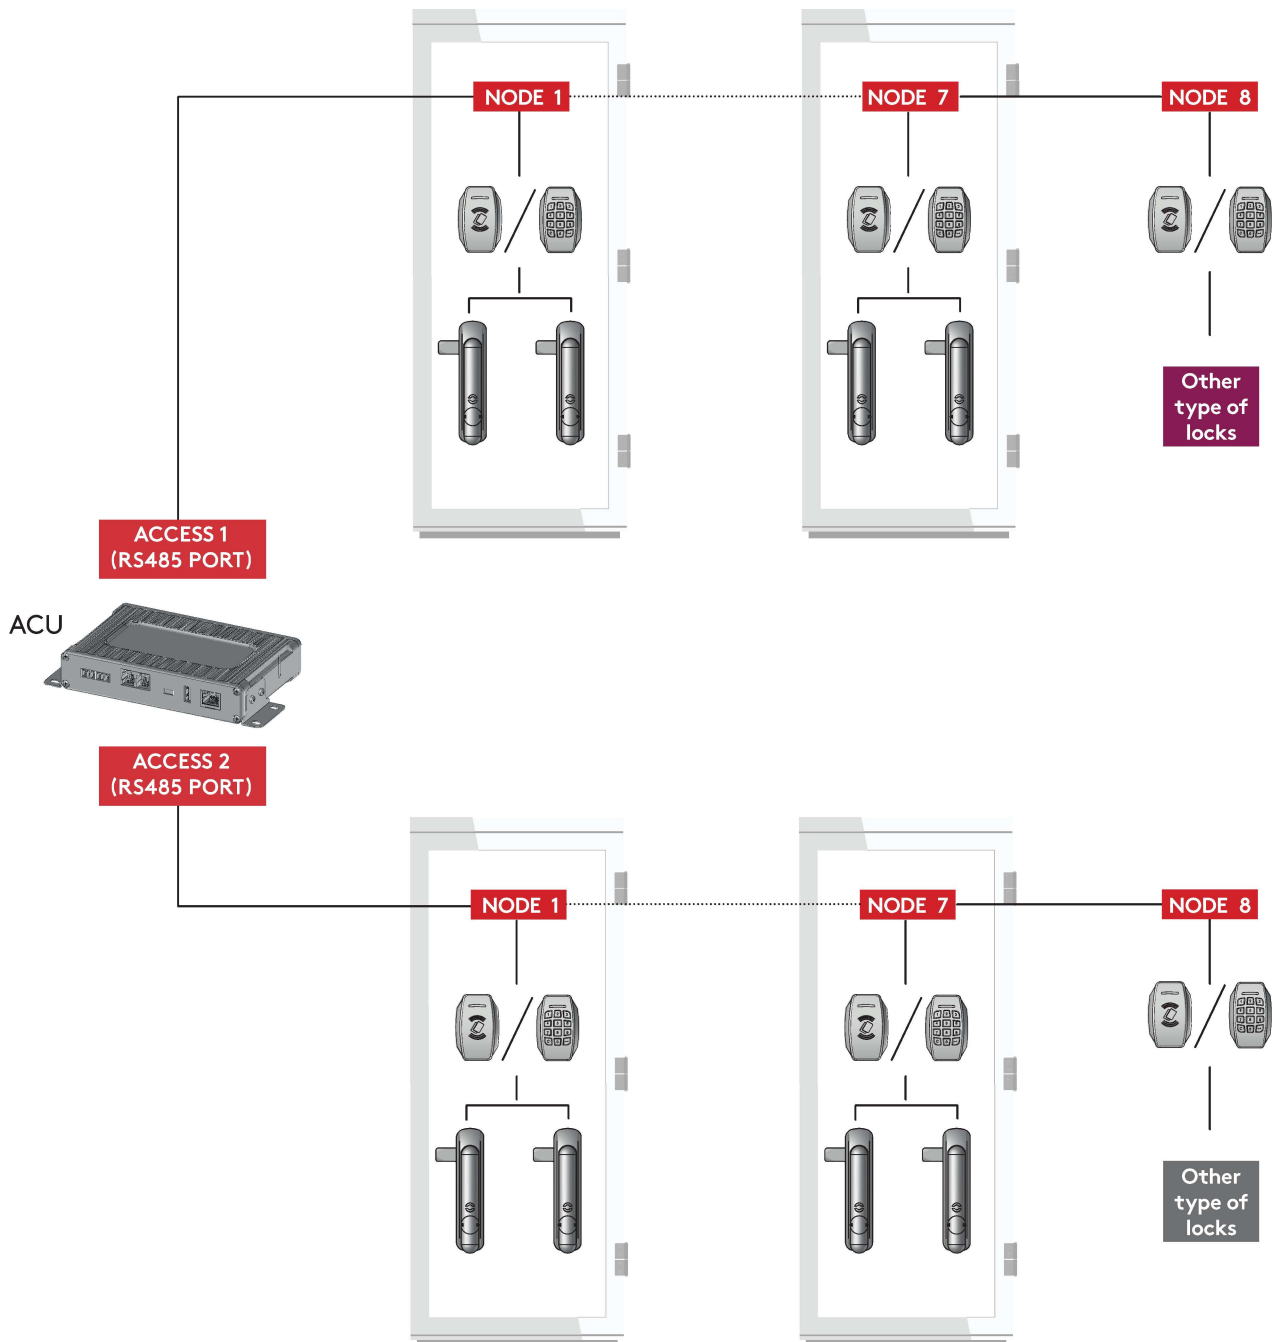

- Up to 18 access interfaces can be connected to access control unit.
- Up to 32 swinghandles can be controlled by one access control unit.
- Two access interfaces are reserved for use of different type of locks (Node 8).

## ACU PLUS ACCESS CONTROL UNIT



The ACU Plus is an intelligent device for monitoring environmental variations, such as temperature, humidity, smoke, presence of water or liquids, etc. and controlling electronic locks and monitoring door status.

- Control of physical access to the rack cabinet
- Monitors and manage environmental and security conditions over IP
- Alerts are sent using email when any monitored environmental condition exceeds a user-specified range
- User database
- Management software for monitoring and configuring the unit
- A sensor for detecting the state of the door (open/closed) can be connected
- Up to 18 AIs (3414 and 3415) can be connected to ACU Plus.


### MANAGEMENT SOFTWARE

- Configure sensor thresholds, set automatic operation and alarm rules
- Monitor current sensor values and alarm status
- Configure network settings (IP address, subnet mask, default gateway, DNS, etc.) and user-administrative settings
- Add and remove users
- View and delete the logs


### APPLICATIONS

Suitable for data centres, co-location centres, web hosting facilities, telecom racks or any unmanned area/site that needs to be monitored

3403

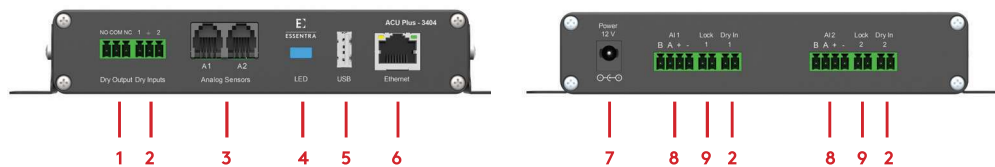

- |                             |                                  |
|-----------------------------|----------------------------------|
| 1 ▶ Dry contact output (2A) | 6 ▶ Ethernet port 10/100         |
| 2 ▶ 4 x dry contact inputs  | 7 ▶ Power input (12VDC 3A)       |
| 3 ▶ 2 x analog sensors      | 8 ▶ 18 x access interface inputs |
| 4 ▶ LED indicator           | 9 ▶ 2 x lock outputs             |
| 5 ▶ USB 2.0                 |                                  |

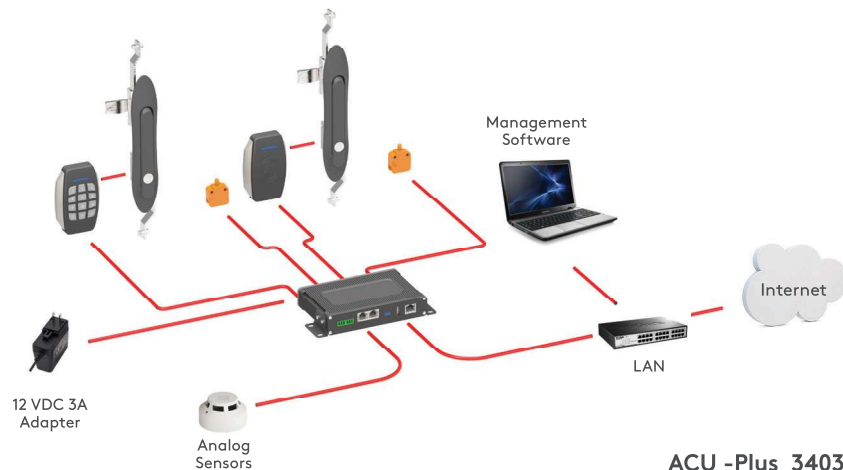

ACU -Plus 3403  
System Overview

### Dry Contact Output

- Dry contact outputs to control, switch on/off external low power devices.
- Output can be used as a NO (Normally Open) or NC (Normally Closed).

### Dry Contact Inputs

- Dry contact inputs to monitor changes in the environment.
- Inputs can be used as sensor input for detecting the state of the door (open/closed)

### Analog Sensors



- 2 x analog sensors outputs to monitor environmental conditions.
- All types of Essentra analog sensors can be connected.

### Access Interfaces

- 2 x access interface inputs allow access by entering a code number or presenting a proximity card.
- Possible to connect 3414 - AIK and 3415 - AIP devices.

### Lock Outputs



- 2 x lock outputs to control physical access to the cabinet.
- Possible to connect wide range of locks.

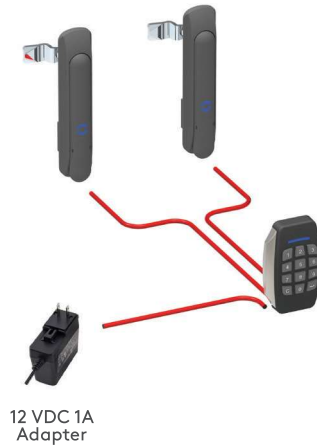

| STATUS INDICATORS |  |       |
|-------------------|--|-------|
| Signal 1          |  | Ready |
| Signal 2          |  | Error |
| Signal 3          |  | Ok    |
| Signal 3          |  | Menu  |

Access interfaces are user-interface devices that allow access by entering a code number or presenting a proximity card.

Beep tones and LEDs on the AI device inform the user about the acceptance or rejection of an operation.

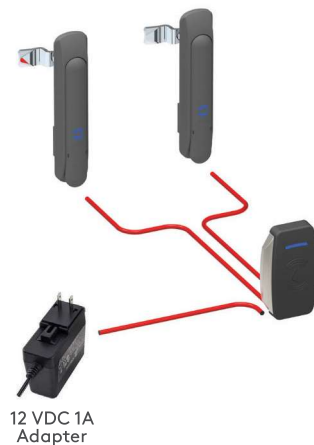

RFID card: 13.56Mhz MIFARE - Standard ISO14443A

Order separately  
Printed: (34002639)  
Unprinted: (34002640)

3416

## S-AIK STANDALONE ACCESS INTERFACE KEYPAD



- Two level password (Master and User)
- Two lock outputs to control physical access to the cabinet
- Possible to connect wide range of locks including electronic swinghandles
- 12 Volt DC supply voltage
- Material: ABS Cover and Zamak5 Body
- It can control the locks separately
- Beep tones and LEDs on the AI device inform the user about the acceptance or rejection of an operation.

3417

## S-AIP STANDALONE ACCESS INTERFACE PROXIMTY



- 2 levels Card (RFID tag) management system (Master and User)
- Standard ISO-14443A RFID
- Two lock outputs to control physical access to the cabinet
- Possible to connect wide range of locks including electronic swinghandles
- 12 Volt DC supply voltage
- Material: ABS Cover and Zamak5 Body
- It can control the locks separately
- Beep tones and LEDs on the AI device inform the user about the acceptance or rejection of an operation.

# ELECTRONIC LOCKING SYSTEM

## AIK ACCESS INTERFACE KEYPAD

3414



Access interfaces are user-interface devices that allow access by entering a code number or presenting a proximity card.

Beep tones and LEDs on the AI device inform the user about the acceptance or rejection of an operation.

## AIP ACCESS INTERFACE PROXIMTY

3415




These access interfaces are used with access control units and they can control to swinghandles ( ACU Plus - 3403 and ACU - 3402)

RFID card: 13.56Mhz MIFARE - Standard ISO14443A

Order separately

Printed: (34002639) / Unprinted: (34002640)

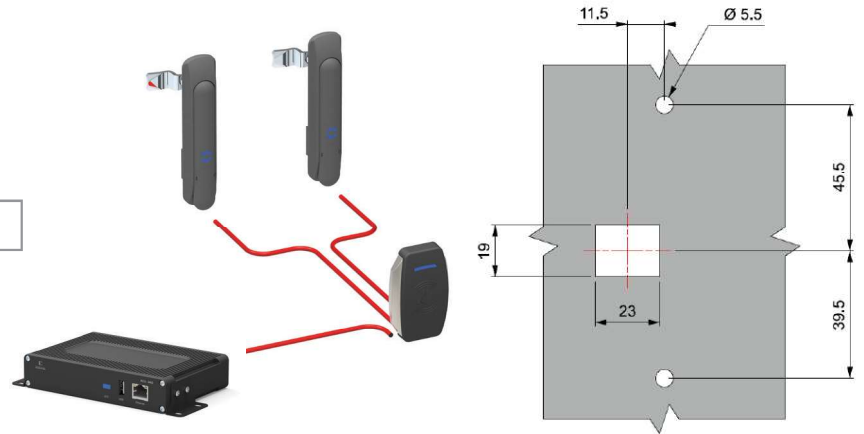

## ACCESSORIES



AC-DC Power Supply  
12 Volt DC 3 Amper  
(34002625)

- Universal input voltage range.
- Up to 36 W continuous power.
- Interchangeable Ac blades for global use.
- Used with monitoring access control units

**Note:** 34002625 Europe blade included.  
Please contacts Essentra for other blades.



AC-DC Power Supply  
12 Volt DC 1 Amper  
(34030041)

- Universal input voltage range.
- Up to 12 W continuous power.
- Used with standalone access interfaces.



RS 485 Repeater  
(34030063)

- Used to connect access interfaces ( AIK - 3414 and AIP - 3415) to each other.



Electronic swinghandle connection cable

| CABLE LENGHT | CODE     |
|--------------|----------|
| 0,4 meter    | 34030039 |
| 4 meter      | 34030006 |
| 6 meter      | 34030064 |

- Used to connect Electronic swing handles to standalone access interfaces
- The same connectors are crimped both ends of the cable.







ACU - AI connection cable  
(4 meter)  
(34030040)

- Used to connect access interfaces ( AIK - 3414 and AIP - 3415) to monitoring and access control units.





## ANALOG SENSORS

|  |  |
|--|--|
| <p><b>Sensor is needed for measurement of temperature indoors.</b></p> <p>Temperature : Min. -50° C - Max.105° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>  | <p>Temperature</p>  <p>34002631</p>         |
| <p><b>Sensor is needed for measurement of temperature outdoors</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>   | <p>Outdoor Temperature</p>  <p>34002637</p> |
| <p><b>Sensor is needed for measurement of relative humidity 10-95% indoors with relative accuracy 5%.</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>  | <p>Humidity</p>  <p>34002649</p>            |
| <p><b>Sensor is needed for measurement of AC 110-240V</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>  | <p>AC Voltage</p>  <p>34002638</p>          |
| <p><b>At installation on doors, windows, etc., sensor controls status of door, window: opened, closed.</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>   | <p>Access Sensor</p>  <p>34002634</p>     |
| <p><b>At installation on walls, windows, etc., sensor monitors vibration. Chain connection is possible.</b></p> <p>Temperature : Min. -10° C - Max.80° C / Temperature : Min. -10° C - Max.80° C</p>   | <p>Vibration</p>  <p>34002635</p>         |
| <p><b>Detector detects smoke indoors. Chain connection is possible.</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>  | <p>Smoke</p>  <p>34002632</p>             |
| <p><b>Sensor is needed for control of movement over an infra-red range.</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>  | <p>Motion (PIR)</p>  <p>34002636</p>      |
| <p><b>When water is in contact with the metal cores, the sensor indicates the emergence of moisture. If sensor is constantly responding to high water levels, replace the sensor with a level sensor. Attention! Metal cores are detectors of water, mount strictly downwards as close as its possible to a floor.</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p> | <p>Water Leak</p>  <p>34002633</p>        |
| <p><b>When water is in contact with detection cable sensor indicates the emergence of moisture. Water detection cable 50 is ordered separately art. SC-WDC! If sensor is constantly responding to high water levels, replace it with a level sensor.</b></p> <p>Temperature : Min. -10° C - Max.80° C / Humidity : Min. 5% - Max. 95% (Non-Condensing)</p>   | <p>Water Leak Cable</p>  <p>34002650</p>  |

## ELECTRONIC SWINGHANDLE

3101

ALL IN METAL



- All metal construction.
- Compatible with access control systems.
- Ability to work mechanically in case of power outage.
- Elegant design.
- Capable to inform door and handle status
- 12 VDC working voltage

### MATERIALS

BODY: Zamak DIN-EN 1774-ZnAl4Cu1  
HANDLE: Zamak DIN-EN 1774-ZnAl4Cu1  
CAM: Steel  
SEAL: Polyurethane

High security electronic products to protect your organisation's data

### APPLICATIONS:


Rack cabinets  
Server rooms  
Telecommunication  
Kiosks  
GSM network cabinets

### Electrical Specifications:

Operating Voltage: 12 VDC  
Operating Temperature: +60/-10 C  
Nominal Operating Current:  
Standby: 6mA  
Lock/Unlock: 75mA  
Max. Current: 400mA


### PIN Connections;

PIN 1- GND  
PIN 2- +12V  
PIN 3- N/A  
PIN 4- Door Position Sensor  
PIN 5- Control Signal  
PIN 6- Handle Position Sensor



Open-close position of door can be monitored. The max distance between the magnet and the lock is 10 mm.

### PIN DETAILS

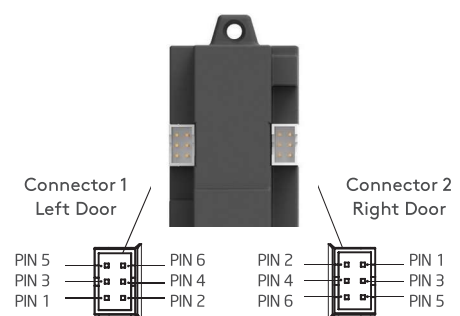

Both connectors have the same function.

### Electronic swinghandle connection cable



The same connectors are crimped both ends of the cable.




3101

3102

3102

ELECTRONIC SWINGHANDLE

ALL IN METAL

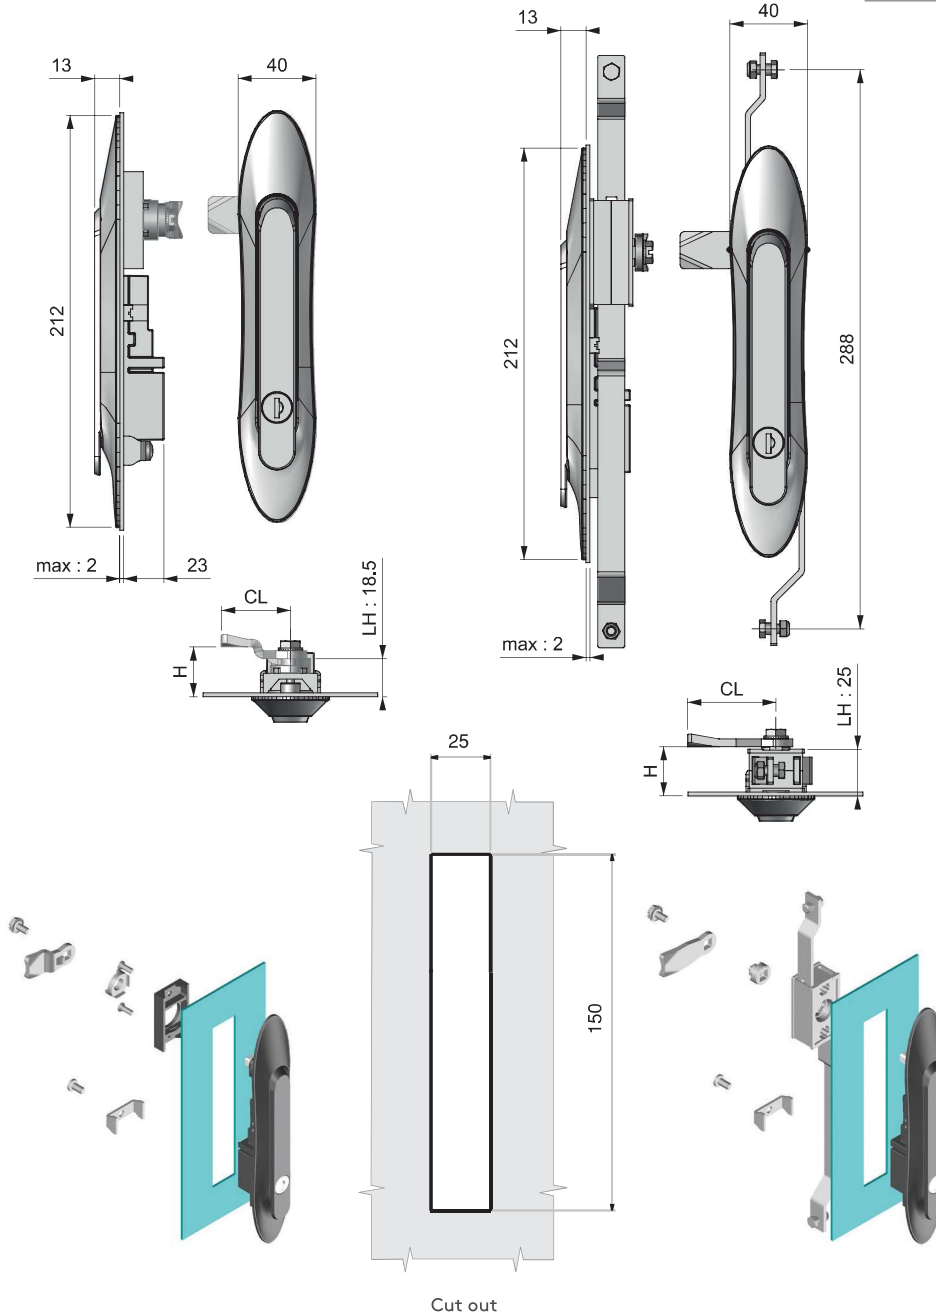

- All metal construction.
- Compatible with access control systems.
- Ability to work mechanically in case of power outage.
- Elegant design.
- Capable to inform door and handle status
- 12 VDC working voltage

## MATERIALS

|         |                            |
|---------|----------------------------|
| BODY:   | Zamak DIN-EN 1774-ZnAl4Cu1 |
| HANDLE: | Zamak DIN-EN 1774-ZnAl4Cu1 |
| CAM:    | Steel                      |
| SEAL:   | Polyurethane               |

| SPECIFICATIONS                          |  |  |  |  | DD |
|---|--|--|--|--|----|
| Stainless steel dust cap (Keyed alike)  |  |  |  |  | 40 |
| Stainless steel dust cap (Keyed differ) |  |  |  |  | 32 |

| Group Code | Handle |   | Body |   | Cylinder | Cam |
|------------|--------|---|------|---|----------|-----|
|            | 1      | 2 | 1    | 2 | DD       | CC  |



For cams and rods, please check  
► Page: 170 -178

## ELECTRONIC SWINGHANDLE

3103



High security electronic products to protect your organisation's data

### APPLICATIONS:

Rack cabinets  
Server rooms  
Telecommunication  
Kiosks  
GSM network cabinets

### Electrical Specifications:

Operating Voltage: 12 VDC  
Operating Temperature: +60/-10 C  
Nominal Operating Current:  
Standby: 6mA  
Lock/Unlock: 75mA  
Max. Current: 400mA

### PIN Connections;

PIN 1- GND  
PIN 2- +12V  
PIN 3- N/A  
PIN 4- Door Position Sensor  
PIN 5- Control Signal  
PIN 6- Handle Position Sensor

### Lock Warning Signs


|          |  |                         |                       |
|----------|--|-------------------------|-----------------------|
| Signal 1 |  | While opening the lock  | LED 1 blinks fast.    |
| Signal 2 |  | While closing the lock  | LED 2 blinks fast.    |
| Signal 3 |  | When the lock is open   | Both LEDs blink fast. |
| Signal 4 |  | When the handle is open | Both LEDs not lit     |
| Signal 5 |  | Error                   | Both LEDs blink slow. |
| Signal 6 |  | Ready                   | Both LEDs are lit.    |

- LED indicators
- Compatible with access control systems.
- Ability to work mechanically in case of power outage.
- Elegant design.
- Capable to inform door and handle status
- 12 VDC working voltage


### MATERIALS

BODY: Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
HANDLE: Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
CAM: Steel

### ELECTRONIC REAR COVER

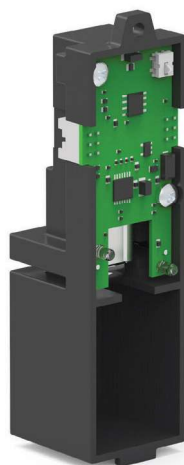

### PIN DETAILS

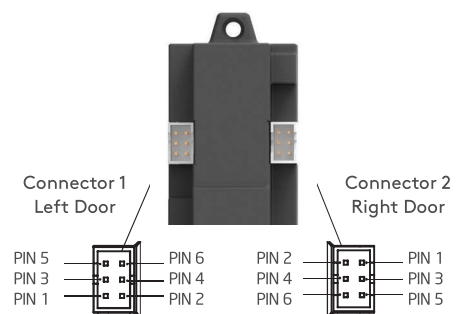

Both connectors have the same function.



### Connection Cable




The same connectors are crimped both ends of the cable.



3103

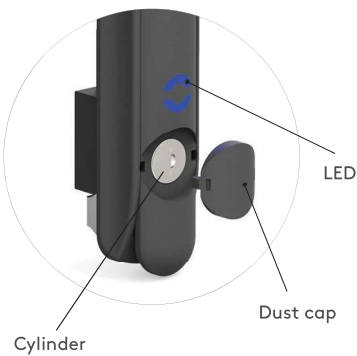
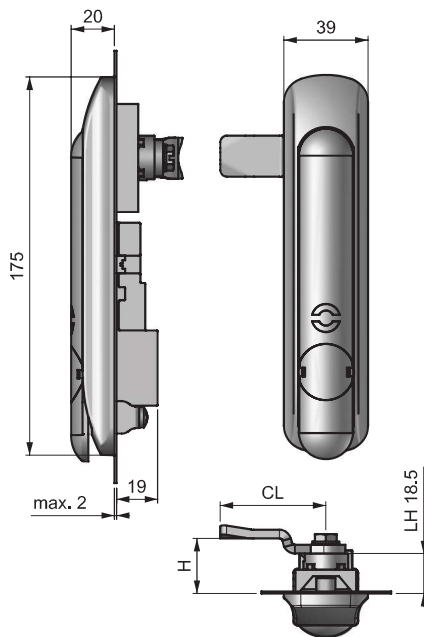


In case of power outage remove the dust cover on the handle and open with the key.

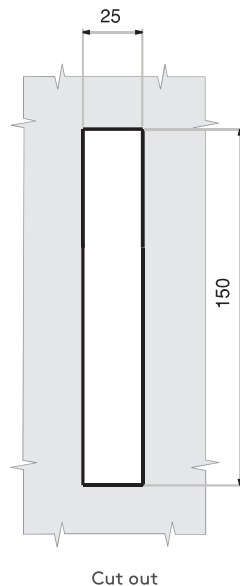

Cut out

3104

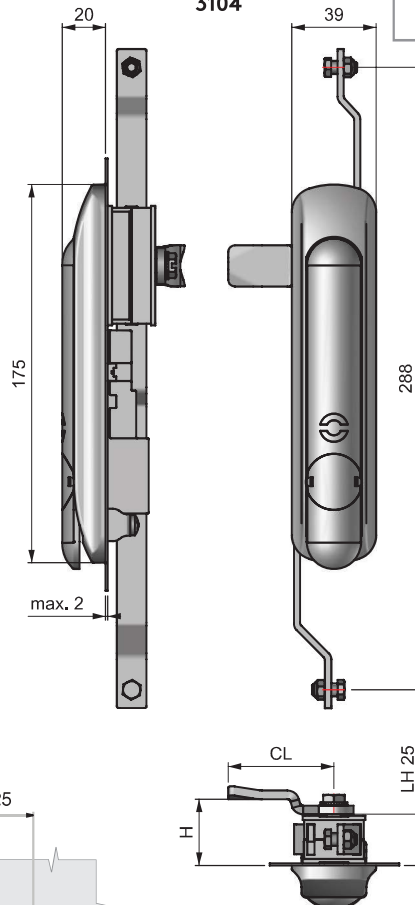

Open-close position of door can be monitored. The max distance between the magnet and the lock is 10 mm.

3104

ELECTRONIC SWINGHANDLE



## MATERIALS

**BODY:** Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
**HANDLE:** Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
**CAM:** Steel

## SPECIFICATIONS

DD

Stainless steel dust cap (Keyed alike)

40


Stainless steel dust cap (Keyed differ)

32

| Group Code | Handle | Body | Cylinder | Cam |
|------------|--------|------|----------|-----|
|            | 2      | 0    | 2        | 0   |
|            |        |      | DD       | CC  |



For cams and rods, please check  
 ► Page: 170 -178

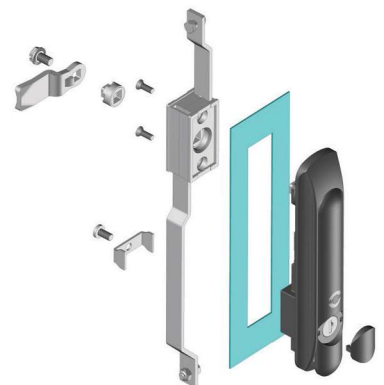



## ELECTRONIC SWINGHANDLE

3111



High security electronic products to protect your organisation's data

### APPLICATIONS:

Rack cabinets  
Server rooms  
Telecommunication  
Kiosks  
GSM network cabinets

### Electrical Specifications:

Operating Voltage: 12 VDC  
Operating Temperature: +60/-10 C  
Nominal Operating Current:  
Standby: 6mA  
Lock/Unlock: 75mA  
Max. Current: 400mA

### PIN Connections;

PIN 1- GND  
PIN 2- +12V  
PIN 3- N/A  
PIN 4- Door Position Sensor  
PIN 5- Control Signal  
PIN 6- Handle Position Sensor


### Lock Warning Signs

|          |  |                         |                       |
|----------|--|-------------------------|-----------------------|
| Signal 1 |  | While opening the lock  | LED 1 blinks fast.    |
| Signal 2 |  | While closing the lock  | LED 2 blinks fast.    |
| Signal 3 |  | When the lock is open   | Both LEDs blink fast. |
| Signal 4 |  | When the handle is open | Both LEDs not lit     |
| Signal 5 |  | Error                   | Both LEDs blink slow. |
| Signal 6 |  | Ready                   | Both LEDs are lit.    |


- Integrated RFID reader.
- Ability to work mechanically in case of power outage
- Capable to inform door and handle status
- LED indicators both on lock and reader
- Supports RS 485 protocol for other protocols please contact to Essentra
- Can be control a swinghandle (3101,3102,3103 and 3104) other than itself
- 12 VDC working voltage
- LED indicators

### MATERIALS

BODY: Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
HANDLE: Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
CAM: Steel

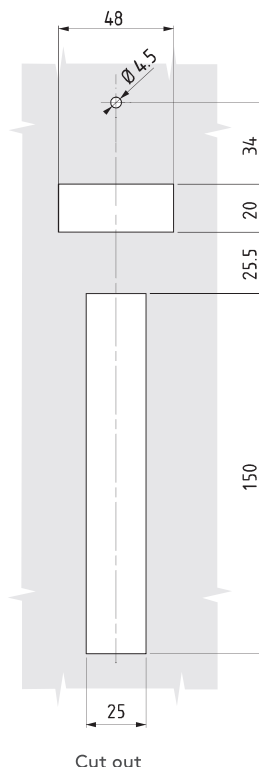

### PIN DETAILS

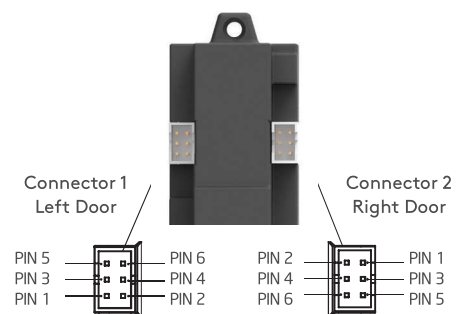

Both connectors have the same function.


### Connection Cable



The same connectors are crimped both ends of the cable.





3111

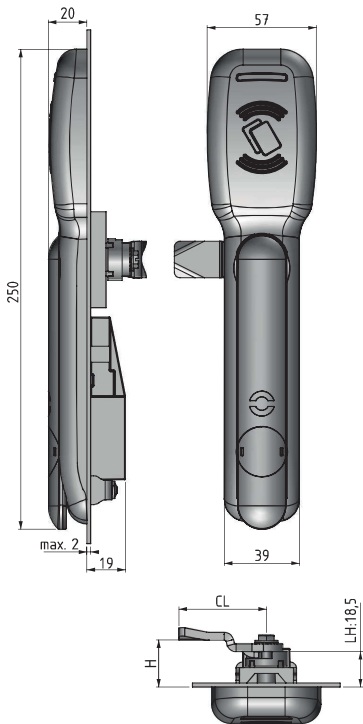

In case of power outage remove the dust cover on the handle and open with the key.

3112

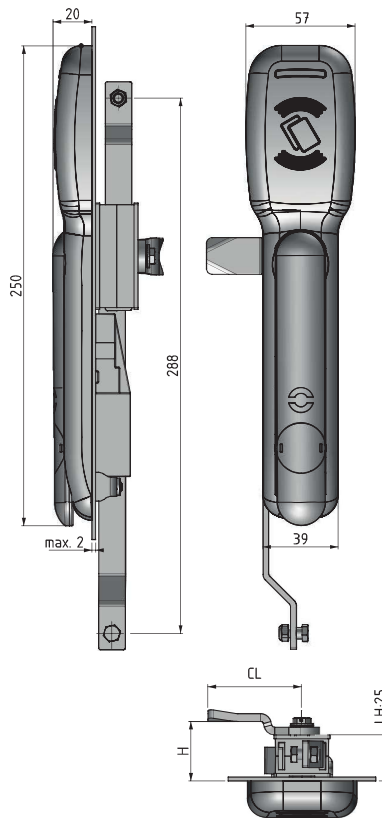

Open-close position of door can be monitored. The max distance between the magnet and the lock is 10 mm.

3112

ELECTRONIC SWINGHANDLE



## MATERIALS

**BODY:** Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
**HANDLE:** Polyamide DIN-EN ISO 1043-1 PA6 GFR 30  
**MECHANISM:** Zamak DIN-EN 1774-ZnAl4Cu1  
**CAM:** Steel

## SPECIFICATIONS

DD

|   |    |
|---|----|
| Stainless steel dust cap (Keyed alike)  | 40 |
| Stainless steel dust cap (Keyed differ) | 32 |

| Group Code | Handle | Body | Cylinder | Cam |
|------------|--------|------|----------|-----|
|            | 2      | 0    | 2        | 0   |
|            |        |      | DD       | CC  |



For cams and rods, please check  
 ► Page: 170 -178

# ▶ ELECTRONIC LOCKING SYSTEM

## ELECTRONIC SWINGHANDLE

3105



High security electronic products to protect your organisation's data

### APPLICATIONS:

Outdoor cabinets  
Telecommunication  
Kiosks  
ATMs  
Electrical enclosures



- Compatible with access control systems.
- All metal construction
- Special geometry provides anti-vandalism safety
- Improved corrosion resistance
- Suitable to DIN V ENV 1630: 1999-04/WK2 test
- Double o-ring used for handle provides improved IP rating
- High-security cylinder alternative
- Better IP rating with moving dust cap

### MATERIALS

BODY: Zamak DIN-EN 1774-ZnAl4Cu1  
GASKET: Polyurethane  
COVER: Zamak DIN-EN 1774-ZnAl4Cu1

### Standard Application

### Electromechanical Application




Simply changing the cover assembly is enough to switch from standard to electromechanical application

### Lock operating principle

Electronical and mechanical

### Technical specifications:

- Voltage: 48 VDC
- Current 500 mA
- High temperature resistance: 150 °C

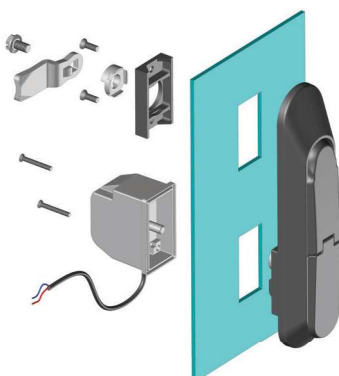

Electronic access options, remote control, card reader, etc., activate the lock. It is then ready to be opened by the mechanical key



**Note:** Remote control should be ordered separately

## 3106


3106



- |            |  |
|------------|--|
| MECHANISM: | 1774-ZnAl4Cu1<br>Zamak DIN-EN<br>1774-ZnAl4Cu1 |
| GASKET:    | Polyurethane                                   |
| COVER:     | Zamak DIN-EN<br>1774-ZnAl4Cu1                  |

| Group Code | Version | Handle |   | Body |   | Cylinder | Cam |
|------------|---------|--------|---|------|---|----------|-----|
|            | V       | 1      | 2 | 1    | 2 | DD       | CC  |



## 23

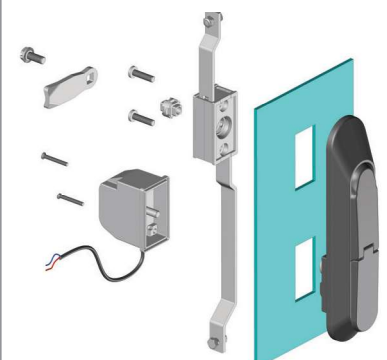

# ELECTRONIC LOCKING SYSTEM

## ELECTRONIC KEEPER

3341

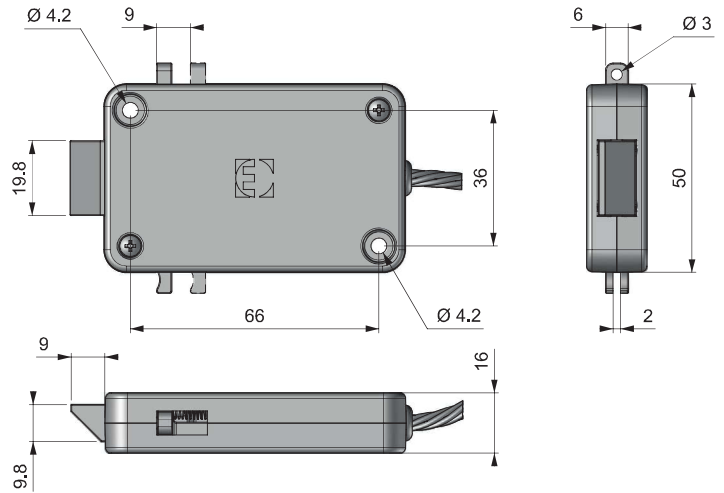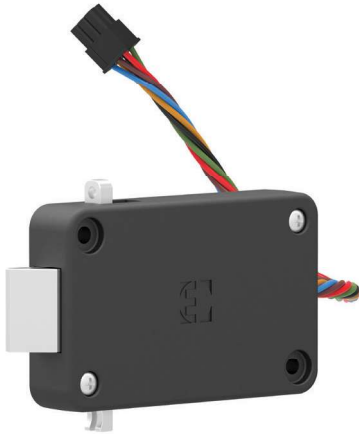


- Push to Close
- 12 Volt DC supply voltage
- Two different mechanical override option
- Auto locking
- Internal microswitch
- Microprocessor controlled gear motor
- Compatible with access control systems

### MATERIALS


BODY: Plastic  
CAM: Zamak 5

### TECHNICAL SPECIFICATIONS

Cable Length : 180 mm  
Operating Voltage : 12 Volt  
Current : Max. 500 mA  
Stroke : 9 mm



| Pins  | Colours |                 |
|-------|---------|-----------------|
| Pin 1 | Black   | GND             |
| Pin 2 | Green   | 12 Volt DC      |
| Pin 3 | Orange  | Signal          |
| Pin 4 | Red     | Microswitch COM |
| Pin 5 | Blue    | Microswitch NO  |
| Pin 6 | Brown   | N/A             |

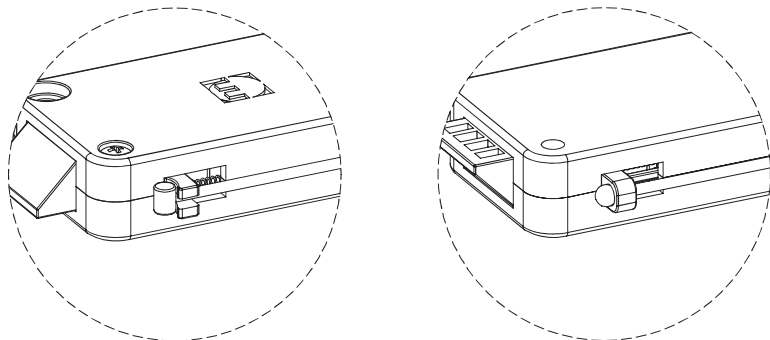



Two different mechanical override option






3311

SOLENOID LOCK

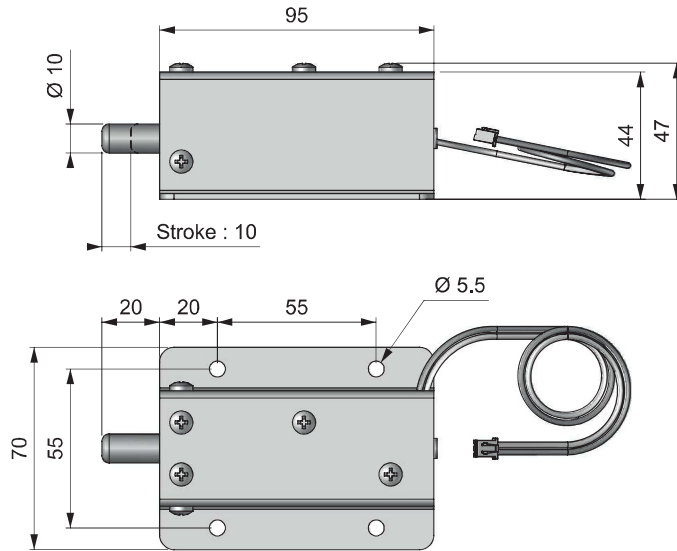

Mechanical override  
with high security cylinder



- Compatible with access control systems
- Push to close with a special bracket
- Mechanical override option
- Auto locking
- DC type solenoid
- Solenoid has no polarity
- Resistance of solenoid varies with the applied voltage,
- The solenoid becomes hot (around 80 °C ) when continuously energized, precautions should be taken to prevent burns

## MATERIALS

BODY: Steel  
PLUNGER: Steel  
BRACKET: Delrin


## TECHNICAL SPECIFICATIONS

Operating Voltage : 24 V DC  
Current Consumption : 550 mA  
Power Consumption : 13,2 W  
Operating  
Temperature Range : - 5 °C/+ 40 °C  
Cable Length : 30 cm  
Stroke : 10 mm

## Please Contact Essentra

- \* For AC type of solenoids
- \* For different voltages
- \* For different strokes

3311 Solenoid Lock

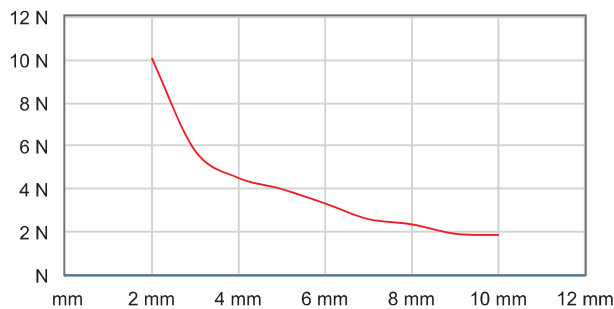

Force - Stroke Graph In Horizontal Installation

| Group Code | Version |
|------------|---------|
| 3311       | V       |

| VERSION                     | V |
|-----------------------------|---|
| Without Mechanical Override | 1 |
| With Mechanical Override    | 2 |

# ELECTRONIC LOCKING SYSTEM

## ELECTRONIC CABINET LOCK


3204



Electronic solutions for improving security

### APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc.

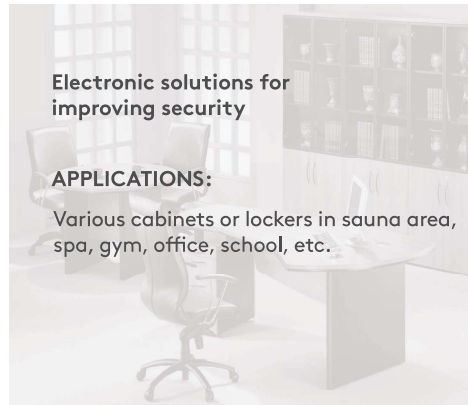


### Technical specifications

- Operating voltage: 3x1.5 V = 4.5 V
- Battery: 3xAAA Alkali battery
- Battery life: Approx. 1.5 year ( daily 10 use )
- Password combination: 4-12 digit
- Operating temperature range: -20°C ~ +70°C
- Operating humidity range: 0 ~ 90 % RH


- Ability to open with a password without card and key
- Elegant design suitable for office environments
- Multi-user support
- Micro USB emergency power-supply
- Low battery level indicator
- For general or specialised use
- Easy installation
- Easy to use
- High-security
- Burglar alarm
- Melody yes/no adjustment
- Stylish visual-warning LEDs

### MATERIALS

BODY: Aluminium  
HANDLE: Aluminium  
PANEL: Plastic  
CAM: Steel

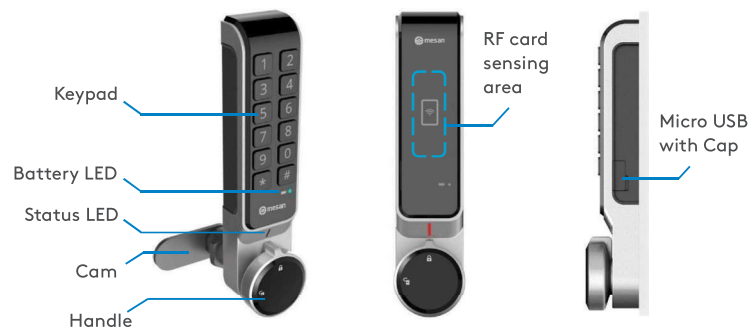

### Change Batteries

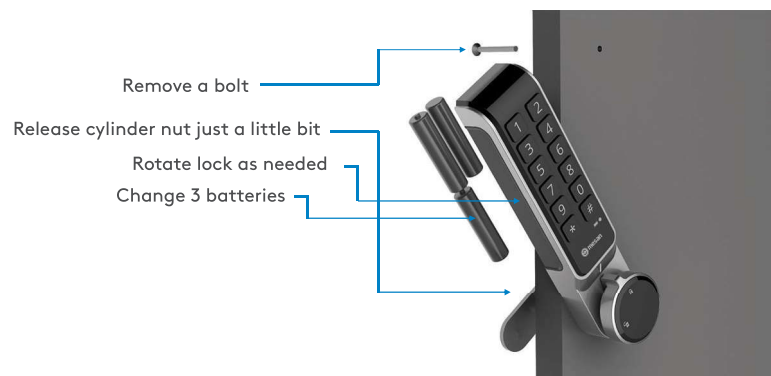

### Note:

Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.

## RFID Card Reader

3205

ELECTRONIC CABINET LOCK



Electronic solutions for improving security

### APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc. .

### Technical specifications

- Operating voltage: 3x1.5 V = 4.5 V
- Battery: 3xAAA Alkali battery
- Battery life: Approx. 1.5 year ( daily 10 use )
- Card type: RFID 13.56Mhz MIFARE - Standard ISO14443A
- Operating temperature range: -20°C ~ +70°C
- Operating humidity range: 0 ~ 90 % RH

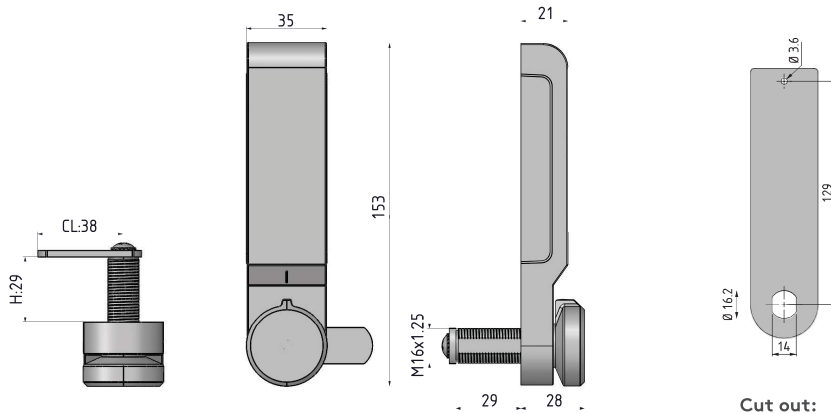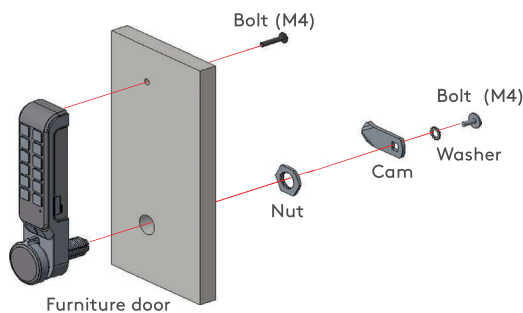

### RFID Card

13.56Mhz MIFARE - Standard ISO14443A



### Order separately

Printed: (340.0.2639)

Unprinted: (340.0.2640)



- Ability to open with a RFID card without key
- Elegant design suitable for office environments
- Multi-user support
- Micro USB emergency power-supply
- Low battery level indicator
- For general or specialised use
- Easy installation
- Easy to use
- High-security
- Burglar alarm
- Melody yes/no adjustment
- Stylish visual-warning LEDs




### MATERIALS

BODY: Aluminium  
HANDLE: Aluminium  
PANEL: Plastic  
CAM: Steel

⚠ These cams are shipping with product.

⚠ For another cam options you can order separately from table.

| CAM   | ITEM CODE | CH | CL |
|---|-----------|----|----|
|  | 30405782  | 0  | 38 |
|  | 30405781  | 5  | 37 |

| CAM   | ITEM CODE | CH | CL |
|---|-----------|----|----|
|  | 31403011  | 0  | 33 |
|  | 30403157  | 3  | 48 |
|  | 30403125  | 7  | 40 |

# ELECTRONIC LOCKING SYSTEM

## ELECTRONIC CABINET LOCK

3211

Touch Panel



Electronic solutions for improving security

### APPLICATIONS:


Various cabinets or lockers in sauna area, spa, gym, office, school, etc.

### Technical specifications

- Ability to open with a password without card and key
- Elegant design suitable for office environments
- When the password has been forgotten, it is possible to remote control and USB-Key for solving the password
- Micro USB emergency power-supply
- Low battery level indicator
- For general or specialised use
- Auto-alarm will be activated when input wrong password 4 times and the lock will be died for 60 seconds.
- You can create the fake pin password against thievery
- Easy installation
- Easy to use
- High-security
- Melody yes/no adjustment
- Stylish visual-warning LEDs



### MATERIALS

BODY: Aluminium  
HANDLE: Aluminium  
CAM: Steel

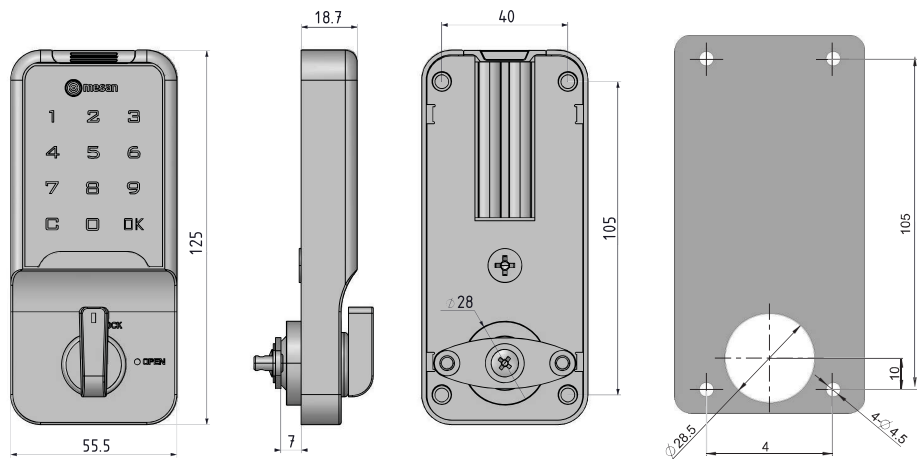

Battery box

Cut out:

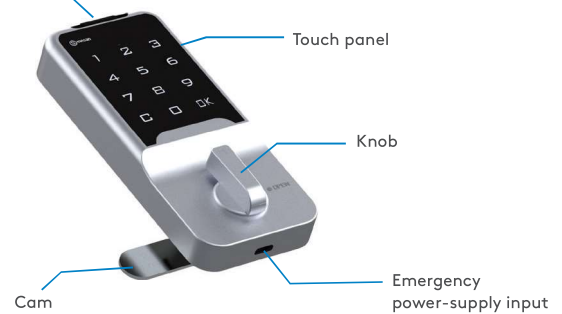

### Note:



Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.



Product will be shipped with **Espagnolette cam** appears in technical drawing.



For another cam options you can v from table.

| CAM  | ITEM CODE | CH | CL |
|--|-----------|----|----|
|  | 30403124  | 0  | 43 |
|  | 31403011  | 0  | 33 |
|  | 30403157  | 3  | 48 |
|  | 30403125  | 7  | 40 |

## Touch Panel

3212

ELECTRONIC CABINET LOCK

Electronic solutions for improving security

### APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc. .

### Technical specifications


- Operating voltage: 3 V
- Battery: Cr2032 battery
- Battery life: Approx. 1.5 year ( daily 10 use )
- Password combination: 1-15 digit
- Operating temperature range: -20°C ~ +70°C
- Operating humidity range: 0 ~ 90 % RH



- Ability to open with a password without card and key
- Elegant design suitable for office environments
- When the password has been forgotten, it is possible to remote control and USB-Key for solving the password
- Micro USB emergency power-supply
- Low battery level indicator
- For general or specialised use
- Auto-alarm will be activated when input wrong password 4 times and the lock will be died for 60 seconds.
- You can create the fake pin password against thievery
- Easy installation
- Easy to use
- High-security
- Melody yes/no adjustment
- Stylish visual-warning LEDs

### MATERIALS

BODY: Aluminium  
HANDLE: Aluminium  
CAM: Steel

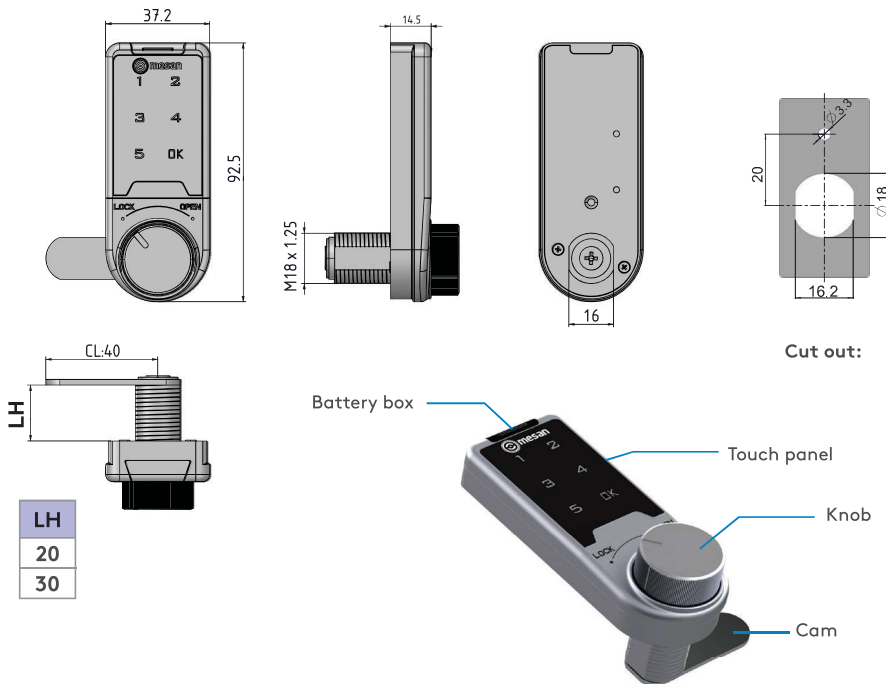

⚠ This cam are shipping with product.

⚠ For another cam options you can order separately from table.

| CAM | ITEM CODE | CH | CL |
|-----|-----------|----|----|
|     | 30403877  | 0  | 40 |

| CAM | ITEM CODE | CH | CL |
|-----|-----------|----|----|
|     | 31403011  | 0  | 33 |
|     | 30403157  | 3  | 48 |
|     | 30403125  | 7  | 40 |

| Group Code | Housing Length |
|------------|----------------|
| 3212       | LH             |

### Note:

Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.



# ELECTRONIC LOCKING SYSTEM

## ELECTRONIC CABINET LOCK

3213

Touch Panel



Electronic solutions for improving security

### APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc.




- Ability to open with a password without card and key
- Elegant design suitable for office environments
- When the password has been forgotten, it is possible to remote control and USB-Key for solving the password
- Micro USB emergency power-supply
- Low battery level indicator
- For general or specialised use
- Auto-alarm will be activated when input wrong password 4 times and the lock will be died for 60 seconds.
- You can create the fake pin password against thievery
- Easy installation
- Easy to use
- High-security
- Melody yes/no adjustment
- Stylish visual-warning LEDs

### MATERIALS

BODY: Aluminium  
CAM: Steel

### Technical specifications

- Operating voltage: 3 V
- Battery: Cr2032 battery
- Battery life: Approx. 1.5 year ( daily 10 use )
- Password combination: 1-15 digit
- Operating temperature range: -20°C ~ +70°C
- Operating humidity range: 0 ~ 90 % RH

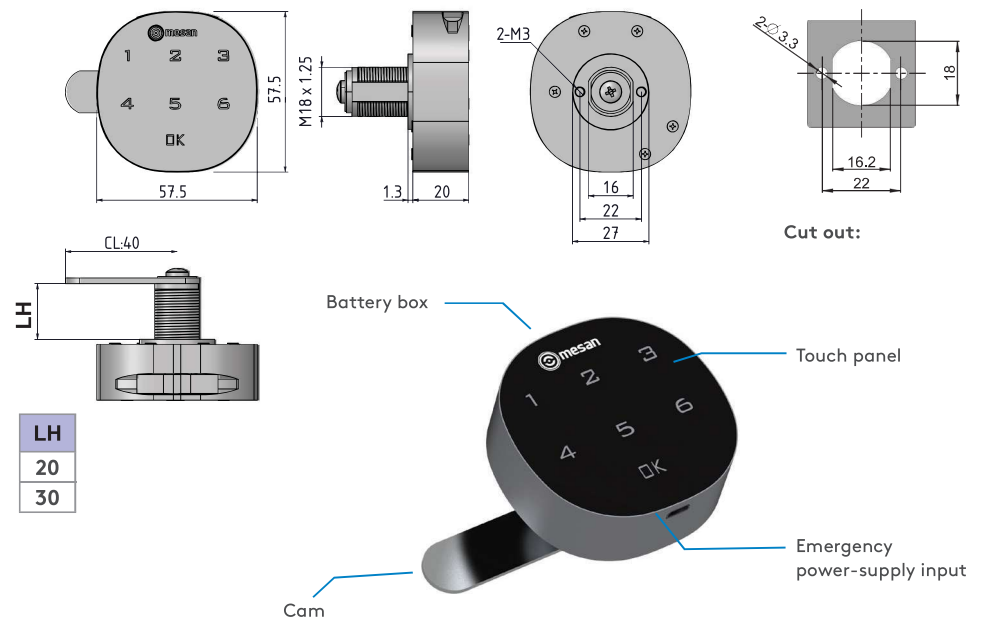

| LH |
|----|
| 20 |
| 30 |

### Note:

Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.

⚠ This cam are shipping with product.

⚠ For another cam options you can order separately from table.

| CAM | ITEM CODE | CH | CL |
|-----|-----------|----|----|
|     | 30403877  | 0  | 40 |

| CAM | ITEM CODE | CH | CL |
|-----|-----------|----|----|
|     | 31403011  | 0  | 33 |
|     | 30403157  | 3  | 48 |
|     | 30403125  | 7  | 40 |

| Group Code | Housing Length |
|------------|----------------|
| 3213       | LH             |



3214

ELECTRONIC CABINET LOCK

Electronic solutions for improving security

#### APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc. .

#### Technical specifications

- Operating voltage: 3x1.5 V = 4.5 V
- Battery: 3xAAA Alkali battery
- Battery life: Approx. 1.5 year ( daily 10 use )
- Password combination: 1-15 digit
- Operating temperature range: -20°C ~ +70°C
- Operating humidity range: 0 ~ 90 % RH




- Ability to open with a password without card and key
- Elegant design suitable for office environments
- When the password has been forgotten, it is possible to remote control and USB-Key for solving the password
- Micro USB emergency power-supply
- Low battery level indicator
- For general or specialised use
- Auto-alarm will be activated when input wrong password 4 times and the lock will be died for 60 seconds.
- You can create the fake pin password against thievery
- Easy installation
- Easy to use
- High-security
- Melody yes/no adjustment
- Stylish visual-warning LEDs

#### MATERIALS

BODY: Plastic  
CAM: Steel

#### Note:

Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.

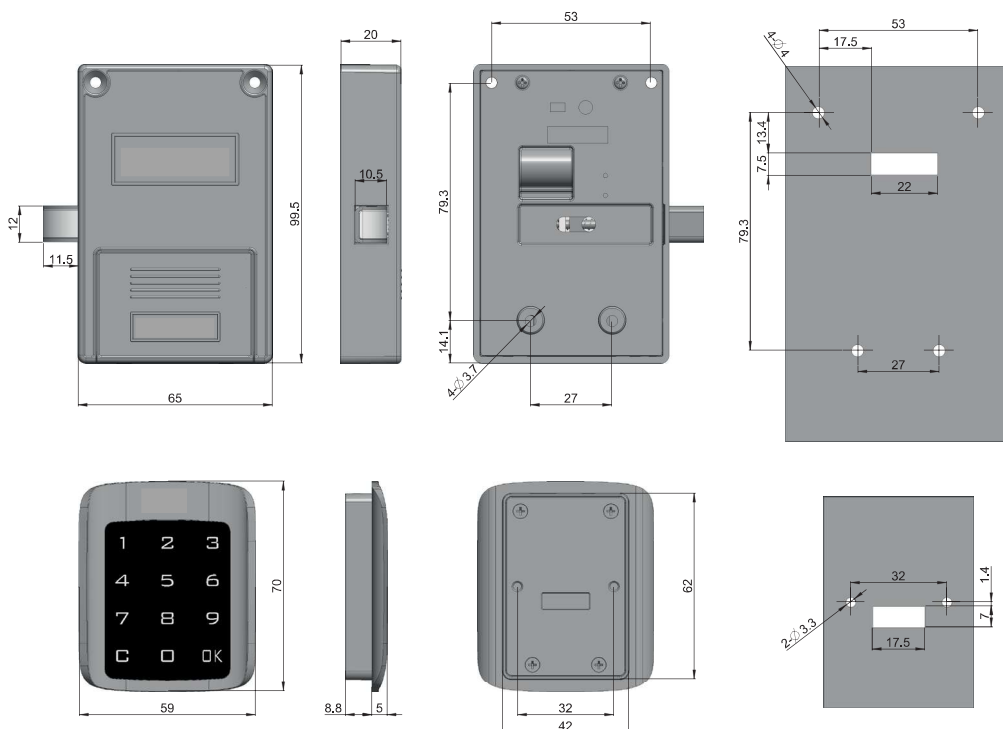

# ELECTRONIC LOCKING SYSTEM

## ELECTRONIC CABINET LOCK

3202



Vertical



Horizontal



- Ability to open with a password without card and key
- Elegant design suitable for office environments
- Multi-user support
- Micro USB emergency power-supply input behind sliding cover
- Low battery level indicator
- For general or specialised use
- Easy installation
- Easy to use
- High-security
- Burglar alarm
- Melody yes/no adjustment
- Stylish visual-warning LEDs

### MATERIALS

|                |         |
|----------------|---------|
| BODY:          | Plastic |
| LATCHING BODY: | Plastic |
| GASKET:        | Rubber  |
| CAM:           | Steel   |

### Note:

Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.

Electronic solutions for improving security

### APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc.

### Technical specifications

- Operating voltage: 3x1.5 V = 4.5 V
- Battery: 3xAA Alkali battery
- Battery life: Approx. 1.5 year ( daily 10 use )
- Password combination: 4-12 digit
- Operating temperature range: -15 ~ 55°C
- Operating humidity range: 0 ~ 90 % RH




Sliding cover

Emergency power-supply input

When it runs out of batteries, slide the cover and the lock can be opened with the Micro USB connector.

Micro USB connector

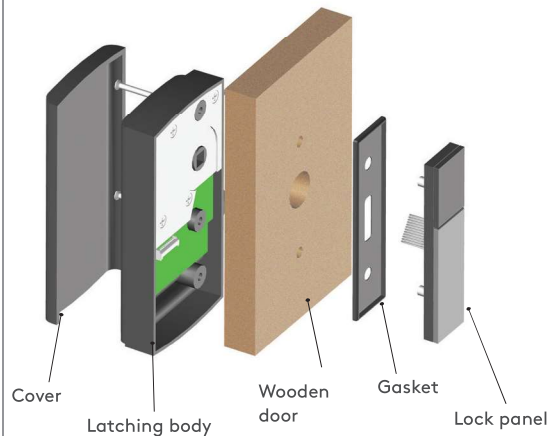


Cover

Latching body

Wooden door

Gasket

Lock panel

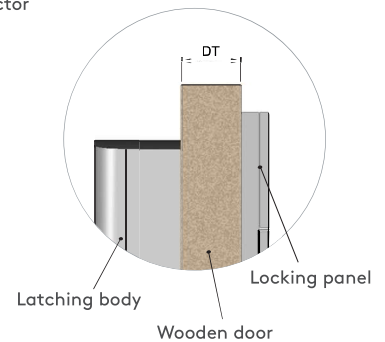

Latching body

Locking panel

Wooden door

### DT - DOOR THICKNESS

| Min  | Max  |
|------|------|
| 11mm | 27mm |

For different door thicknesses please contact Essentra.



RFID Card Reader

3203

ELECTRONIC CABINET LOCK

Electronic solutions for improving security





## APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc. .

## Technical specifications

- Operating voltage: 3x1.5 V = 4.5 V
- Battery: 3xAA Alkali battery
- Battery life: Approx. 1.5 year ( daily 10 use )
- Card type: RFID 13.56Mhz MIFARE - Standard ISO14443A
- Operating temperature range: -15 ~ 55°C
- Operating humidity range: 0 ~ 90 % RH

## External dimensions

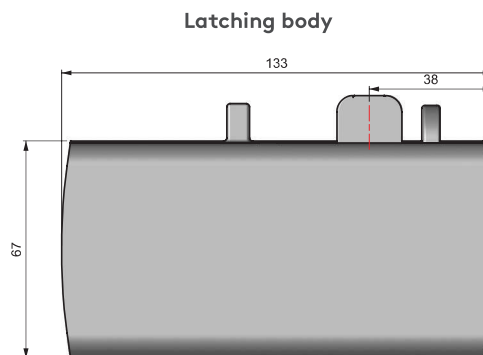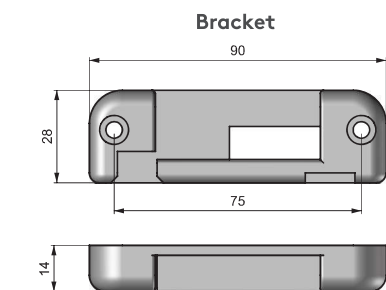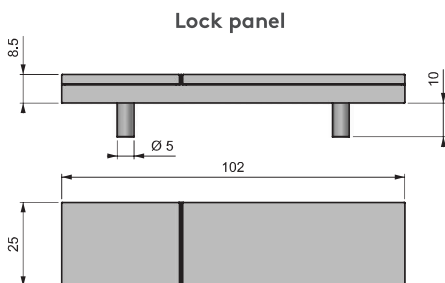

## Note:

Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.

Vertical



Horizontal



## RFID Card

13.56Mhz MIFARE - Standard ISO14443A



## Order separately

Printed: (340.0.2639)

Unprinted: (340.0.2640)

- Ability to open with a RFID card without key
- Elegant design suitable for office environments
- Multi-user support
- Micro USB emergency power supply input behind sliding cover
- Low-battery level indicator
- For general or specialised use
- Easy installation
- Easy to use
- High security
- Burglar alarm
- Melody yes/no adjustment
- Stylish visual-warning LEDs

## MATERIALS

BODY: Plastic  
LOCK PANEL: Plastic  
GASKET: Rubber  
CAM: Steel

| Group Code | Position |
|------------|----------|
|            | P        |

| POSITION   | P |
|------------|---|
| Horizontal | 1 |
| Vertical   | 2 |

# ELECTRONIC LOCKING SYSTEM

## ELECTRONIC CABINET LOCK

3201



Keypad



Electronic solutions for improving security

### APPLICATIONS:

Various cabinets or lockers in sauna area, spa, gym, office, school, etc.



- Input password to open door; no need for card or key
- Two types:
  - Public with temporary password
  - Private with permanent password
- Two management levels: master code and user code
- Low power alarm: the lock will indicate when the battery has insufficient power
- Emergency open: external power supply can be used via a socket in the lock if sufficient battery power is not available




### MATERIALS

LOCK PANEL: Zamak  
KEYS: Plastic  
LOCK BODY: Plastic  
CAM: Zamak

### Technical specifications

Password digital:  $\geq 4, \leq 10$   
Power source: 4 pcs AAA alkaline batteries  
Static current:  $<10\mu A$   
Dynamic current:  $<220mA$   
Alarm power:  $<4.7V$   
Memory capacity: 4160 Bit

Work temperature:  $-25^{\circ}C \sim 65^{\circ}C$   
Store temperature:  $-25^{\circ}C \sim 85^{\circ}C$   
Store time:  $>10$  years  
Change: 1,000,000 times  
Work humidity: 5 ~ 95 % RH  
(No condensation)

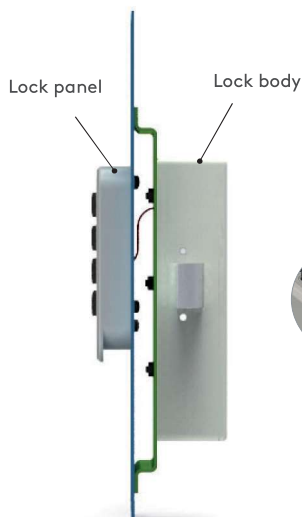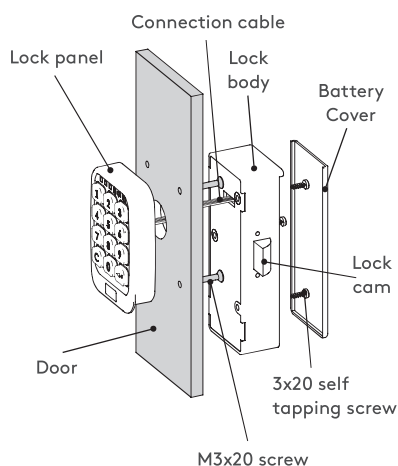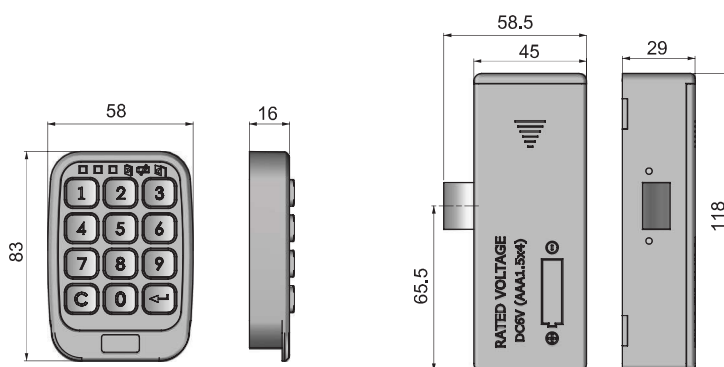

### Note:

Instructions for use, installation dimensions, etc. More information is available in the instruction book with the lock.



External power socket



External power supply  
product code:  
340.0.2643  
(Order separately)

Electronic solutions for improving security

#### APPLICATIONS:

- Coolers
- Fridges
- Electric panels
- Cabinets



#### Technical specifications

##### Main board

- Input voltage: 12V - 18V AC
- Output current: 650 mA x2
- RF frequency: 433.92 MHz
- Working temperature range: -25 °C ~ +70 °C
- Control: Microprocessor
- Cable length: 70 cm
- Alert type: Buzzer
- Identification: Master remote control Watchdog
- Locking security:

##### Remote control:

- RF Frequency: 433.92 MHz
- Keys: 2 (Open/Close)
- Battery: 27A
- Control distance: 50 m (ideal conditions)

##### Master remote control

- RF Frequency: 433.92 MHz
- Keys: 2 (Same function)
- Battery: 27A
- Function: New remote control identification



- Microprocessor controlled.
- Working voltage 220 V AC (with a special transformer)
- Open and close remote control
- Buzzer
- Manual opening slot in case of power outage
- New remote control identification with a master remote control
- More than one lock can be controlled by one remote control or vice versa
- More than one remote control can control one lock
- Stroke: 8 mm

#### MATERIALS

- BODY: Plastic
- PLUNGER: Steel
- BRACKET: Delrin

#### Multidirectional application

